



## Product Information

### 268- MERITOR® RT-46-160™ TANDEM DRIVE AXLE


Updated: October 11, 2024

This document explains the features and attributes found in the Meritor RT-46-160 tandem drive axles. Axle model and feature availability may vary by truck model, axle ratio, suspension type, and wheel differential lockout options.

- Carrier: Meritor RT-46
- Lubrication pump: With or without

Optional axle housing wall thickness at spring seats:

RT-46-160 (46,000 lbs. / 20,884 kg)	
Standard track only	Standard track and wide track
0.50 in. (12.7 mm)	0.63 in. (16.0 mm)

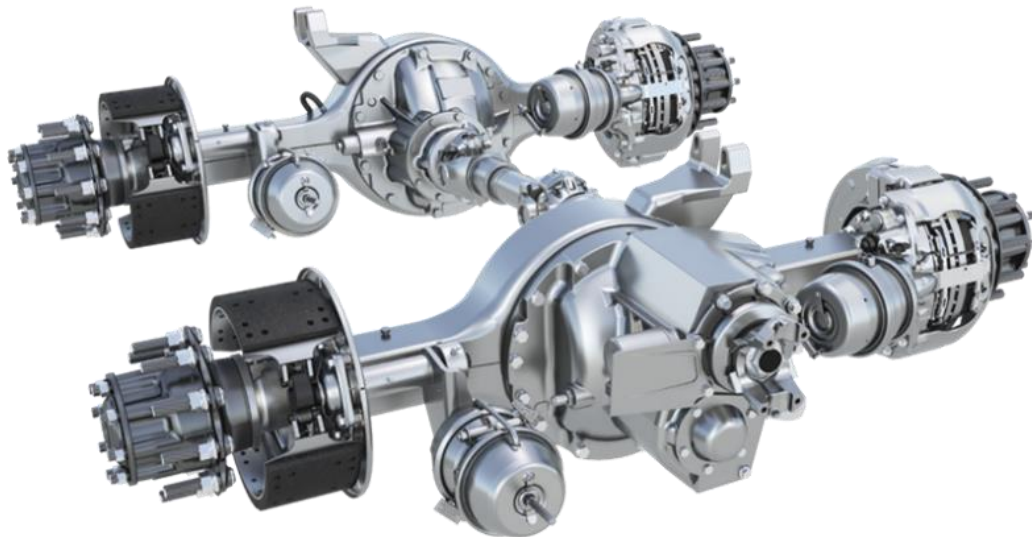

- High-torque gear design delivers smoother and quieter operation, greater torque capacity and longer component life
- Rugged, single-piece carrier design supports precise gear alignment